




## 310W PERC Module

JAM60S01 285-310/PR/1000V Series

### Introduction

Powered by high-efficiency PERCIUM cells, this series of high-performance modules provides the most cost-effective solution for lowering the LCOE of any PV systems large or small.

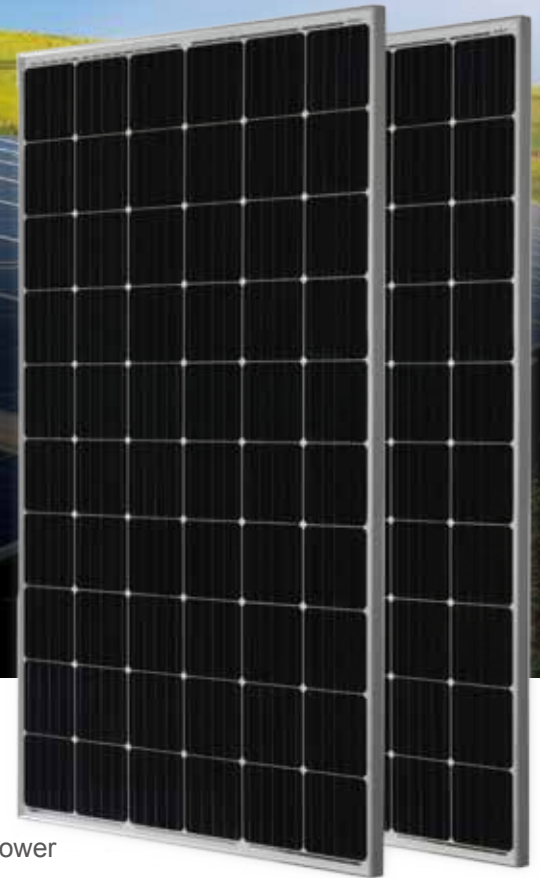

5 busbar solar cell design



Higher output power




Excellent low-light performance



Lower temperature coefficient

### Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

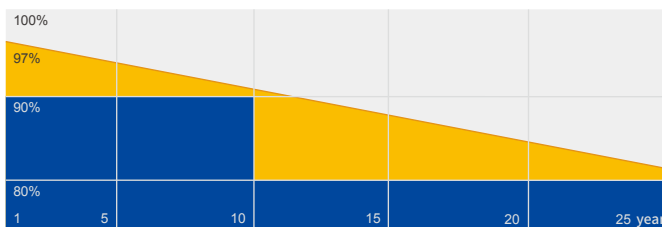


■ JA Linear Power Warranty ■ Industry Warranty

### Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems



**MECHANICAL DIAGRAMS**

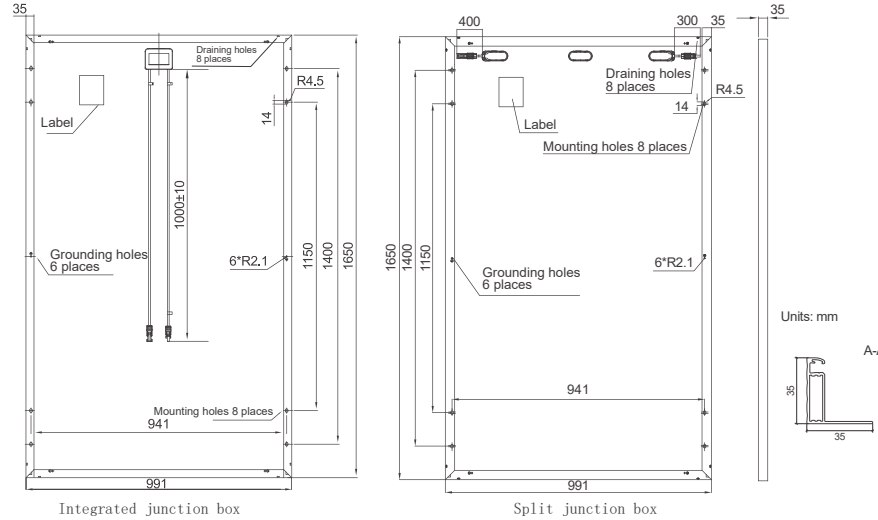

**SPECIFICATIONS**

Cell	Mono
Weight	18.2kg±3%
Dimensions	1650mm×991mm×35mm
Cable Cross Section Size	4mm <sup>2</sup>
No. of cells	60(6x10)
Connector	Genuine MC4 QC4.10
Country of Manufacturer	China/Vietnam

Remark: customized frame color and cable length available upon request

**ELECTRICAL PARAMETERS AT STC**

TYPE	JAM60S01-285/PR /1000V	JAM60S01-290/PR /1000V	JAM60S01-295/PR /1000V	JAM60S01-300/PR /1000V	JAM60S01-305/PR /1000V	JAM60S01-310/PR /1000V
Rated Maximum Power(Pmax) [W]	285	290	295	300	305	310
Open Circuit Voltage(Voc) [V]	39.25	39.46	39.64	39.85	40.05	40.30
Maximum Power Voltage(Vmp) [V]	31.70	31.80	32.03	32.26	32.57	32.84
Short Circuit Current(Isc) [A]	9.46	9.57	9.66	9.75	9.85	9.91
Maximum Power Current(Imp) [A]	8.99	9.12	9.21	9.30	9.37	9.44
Module Efficiency [%]	17.4	17.7	18.0	18.3	18.7	19.0
Power Tolerance	0~+5W					
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.060%/°C					
Temperature Coefficient of Voc(β <sub>Voc</sub> )	-0.300%/°C					
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.380%/°C					
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.

**ELECTRICAL PARAMETERS AT NOCT**


TYPE	JAM60S01-285/PR/1000V	JAM60S01-290/PR/1000V	JAM60S01-295/PR/1000V	JAM60S01-300/PR/1000V	JAM60S01-305/PR/1000V	JAM60S01-310/PR/1000V
Rated Max Power(Pmax) [W]	209	213	217	221	224	228
Open Circuit Voltage(Voc) [V]	36.11	36.34	36.57	36.75	36.95	37.15
Max Power Voltage(Vmp) [V]	29.37	29.56	29.63	29.69	29.90	30.18
Short Circuit Current(Isc) [A]	7.53	7.61	7.69	7.78	7.86	7.93
Max Power Current(Imp) [A]	7.13	7.21	7.32	7.43	7.50	7.55
NOCT	Irradiance 800W/m <sup>2</sup> , ambient temperature 20°C, wind speed 1m/s, AM1.5G					

**OPERATING CONDITIONS**


Maximum System Voltage	1000V DC(IEC)
Operating Temperature	-40°C~+85°C
Maximum Series Fuse	20A
Maximum Static Load,Front	3600Pa, 1.5
Maximum Static Load,Back	1600Pa, 1.5
NOCT	45±2°C
Application Class	Class A

**CHARACTERISTICS**

Current-Voltage Curve JAM60S01-300/PR/1000V



Power-Voltage Curve JAM60S01-300/PR/1000V



Current-Voltage Curve JAM60S01-300/PR/1000V

