



Mono

330W PERC Half-Cell Black Module

JAM60S08 310-330/PR/1000V Series

Introduction

Assembled with high-efficiency PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower temperature coefficient




Less shading effect



Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

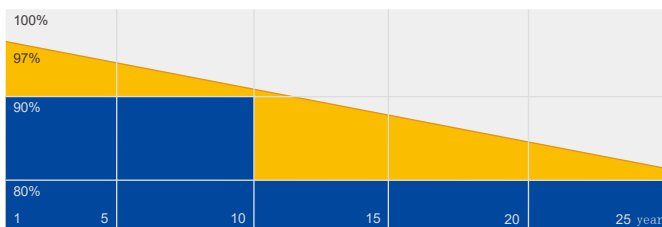

■ JA Linear Power Warranty ■ Industry Warranty



Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems



MECHANICAL DIAGRAMS

SPECIFICATIONS

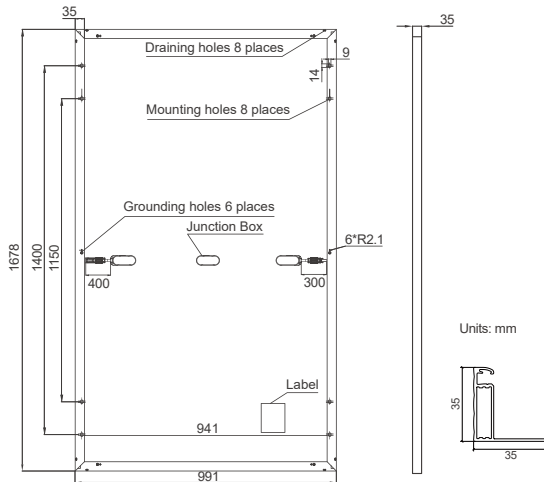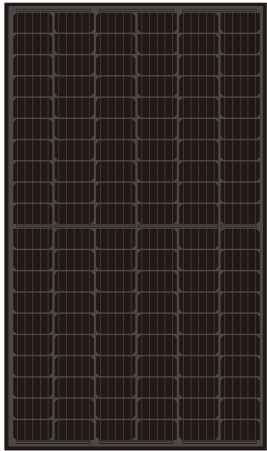

Remark: customized frame color and cable length available upon request

Cell	Mono
Weight	18.5kg±3%
Dimensions	1678mm×991mm×35mm
Cable Cross Section Size	4mm ²
No. of cells	120(6x20)
Connector	Genuine MC4 QC4.10
Country of Manufacturer	China/Vietnam

ELECTRICAL PARAMETERS AT STC

TYPE	JAM60S08-310 /PR/1000V	JAM60S08-315 /PR/1000V	JAM60S08-320 /PR/1000V	JAM60S08-325 /PR/1000V	JAM60S08-330 /PR/1000V
Rated Maximum Power(Pmax) [W]	310	315	320	325	330
Open Circuit Voltage(Voc) [V]	39.61	39.93	40.22	40.56	40.84
Maximum Power Voltage(Vmp) [V]	32.78	33.07	33.34	33.65	33.91
Short Circuit Current(Isc) [A]	10.03	10.10	10.16	10.22	10.29
Maximum Power Current(Imp) [A]	9.46	9.53	9.60	9.66	9.74
Module Efficiency [%]	18.6	18.9	19.2	19.5	19.8
Power Tolerance	0~+5W				
Temperature Coefficient of Isc(α _{Isc})	+0.051%/°C				
Temperature Coefficient of Voc(β _{Voc})	-0.289%/°C				
Temperature Coefficient of Pmax(γ _{Pmp})	-0.360%/°C				
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G				

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.


ELECTRICAL PARAMETERS AT NOCT

OPERATING CONDITIONS


TYPE	JAM60S08-310/PR/1000V	JAM60S08-315/PR/1000V	JAM60S08-320/PR/1000V	JAM60S08-325/PR/1000V	JAM60S08-330/PR/1000V	Operating Conditions
Rated Max Power(Pmax) [W]	229	233	237	241	244	Maximum System Voltage 1000V DC(IEC)
Open Circuit Voltage(Voc) [V]	36.61	36.93	37.15	37.38	37.65	Operating Temperature -40°C~+85°C
Max Power Voltage(Vmp) [V]	32.77	33.06	33.31	33.54	33.82	Maximum Series Fuse 20A
Short Circuit Current(Isc) [A]	8.02	8.08	8.14	8.20	8.25	Maximum Static Load,Front 3600Pa, 1.5
Max Power Current(Imp) [A]	7.00	7.05	7.11	7.17	7.22	Maximum Static Load,Back 1600Pa, 1.5
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					NOCT 45±2°C
						Application Class Class A

CHARACTERISTICS

Current-Voltage Curve JAM60S08-310/PR/1000V

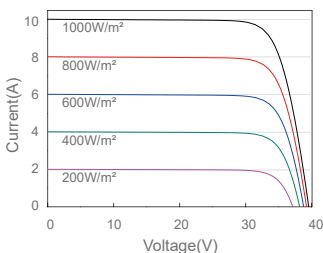

Power-Voltage Curve JAM60S08-310/PR/1000V

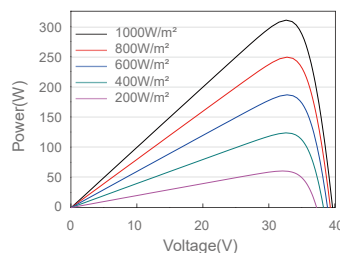

Current-Voltage Curve JAM60S08-310/PR/1000V

