

## DEEP BLUE 4.0

**Mono**

435W n-type MBB Half-cell  
High Efficiency Mono Black Module  
JAM54S41 410-435/GR/1500V Series

### Introduction

Powered by the latest MBB n-type solar cell and half-cell configuration, these modules have higher output power, lower LID, better weak illumination response, and better temperature coefficient.



Higher power generation  
better LCOE



Better weak illumination response




Better Temperature Coefficient

### Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

0.55% Annual Degradation  
Over 25 years

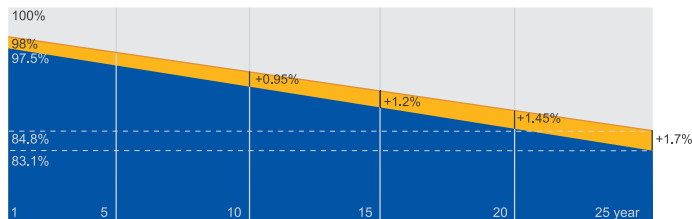

■ New linear power warranty ■ Standard module linear power warranty


### Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems



**MECHANICAL DIAGRAMS**

**SPECIFICATIONS**

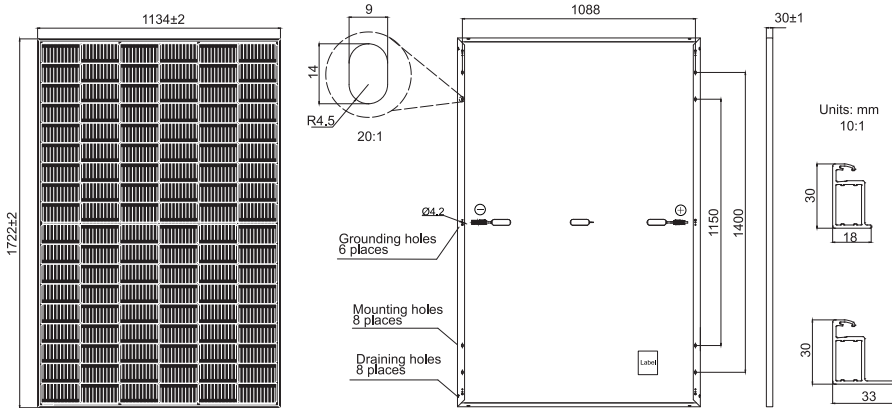

Cell	Mono
Weight	19.5kg or 21.5kg
Dimensions	1722±2mm×1134±2mm×30±1mm
Cable Cross Section Size	4mm <sup>2</sup> (IEC), 12 AWG(UL)
No. of cells	108(6×18)
Junction Box	IP68, 3 diodes
Connector	Stäubli MC4-EVO2A/MC4-EVO2 QC Solar QC 4.10-35/ QC 4.10-35I
Cable Length (Including Connector)	Portrait:200mm(+)/300mm(-); Landscape: 1100mm(+)/1100mm(-)
Country of Manufacturer	China/Vietnam
Front Glass	2.8mm or 3.2mm

Remark: customized frame color and cable length available upon request

**ELECTRICAL PARAMETERS AT STC**

TYPE	JAM54S41 -410/GR/1500V	JAM54S41 -415/GR/1500V	JAM54S41 -420/GR/1500V	JAM54S41 -425/GR/1500V	JAM54S41 -430/GR/1500V	JAM54S41 -435/GR/1500V
Rated Maximum Power(Pmax) [W]	410	415	420	425	430	435
Open Circuit Voltage(Voc) [V]	37.82	37.92	38.05	38.20	38.32	38.45
Maximum Power Voltage(Vmp) [V]	31.37	31.59	31.80	32.01	32.21	32.42
Short Circuit Current(Isc) [A]	13.95	14.02	14.09	14.16	14.23	14.30
Maximum Power Current(Imp) [A]	13.07	13.14	13.21	13.28	13.35	13.42
Module Efficiency [%]	21.0	21.3	21.5	21.8	22.0	22.3
Power Tolerance	0~+5W					
Temperature Coefficient of Isc(α <sub>Isc</sub> )	+0.046%/°C					
Temperature Coefficient of Voc(β <sub>Voc</sub> )	-0.260%/°C					
Temperature Coefficient of Pmax(γ <sub>Pmp</sub> )	-0.300%/°C					
STC	Irradiance 1000W/m <sup>2</sup> , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.They only serve for comparison among different module types.  
Measurement tolerance at STC: Pmax ±3%, Voc ±3% and Isc ±4%.


**ELECTRICAL PARAMETERS AT NOCT**

**OPERATING CONDITIONS**


TYPE	JAM54S41 -410/GR/1500V	JAM54S41 -415/GR/1500V	JAM54S41 -420/GR/1500V	JAM54S41 -425/GR/1500V	JAM54S41 -430/GR/1500V	JAM54S41 -435/GR/1500V		
Rated Max Power(Pmax) [W]	310	314	318	322	326	330	Maximum System Voltage	1500V DC
Open Circuit Voltage(Voc) [V]	36.27	36.37	36.50	36.65	36.77	36.90	Operating Temperature	-40°C~+85°C
Max Power Voltage(Vmp) [V]	29.68	29.89	30.09	30.27	30.48	30.73	Maximum Series Fuse Rating	25A
Short Circuit Current(Isc) [A]	11.16	11.22	11.27	11.33	11.38	11.43	Maximum Static Load,Front Maximum Static Load,Back	3600Pa, 1.5 1600Pa, 1.5
Max Power Current(Imp) [A]	10.46	10.51	10.57	10.63	10.68	10.74	NOCT	45±2°C
NOCT	Irradiance 800W/m <sup>2</sup> , ambient temperature 20°C,wind speed 1m/s, AM1.5G						Safety Class	Class II
							Fire Safety Class	Class C

**CHARACTERISTICS**

Current-Voltage Curve JAM54S41-425/GR/1500V

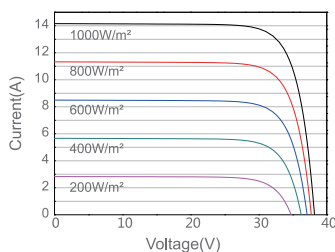

Power-Voltage Curve JAM54S41-425/GR/1500V

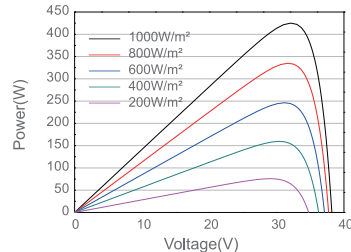

Current-Voltage Curve JAM54S41-425/GR/1500V

