

Harvest the Sunshine

JA SOLAR

605W



JAM72S40 MR n-type Monofacial Modules

Premium Cells

n-
Bycium+
16BB

MBB Half-Cell
Technology

26%



Cell Conversion
Efficiency


Premium Modules

Higher power
generation better LCOE

n-type with very
Lower LID

Better Temperature
Coefficient

Better low irradiance
response

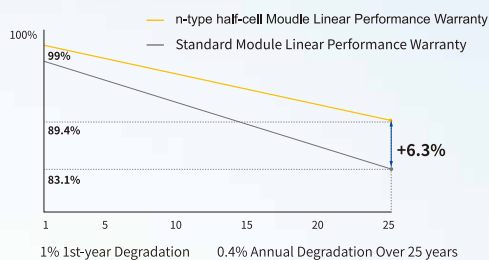

12-year product
warranty

25-year linear power
output warranty


Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



DEEP BLUE 4.0 Pro

JAM72S40 MR n-type Monofacial Modules

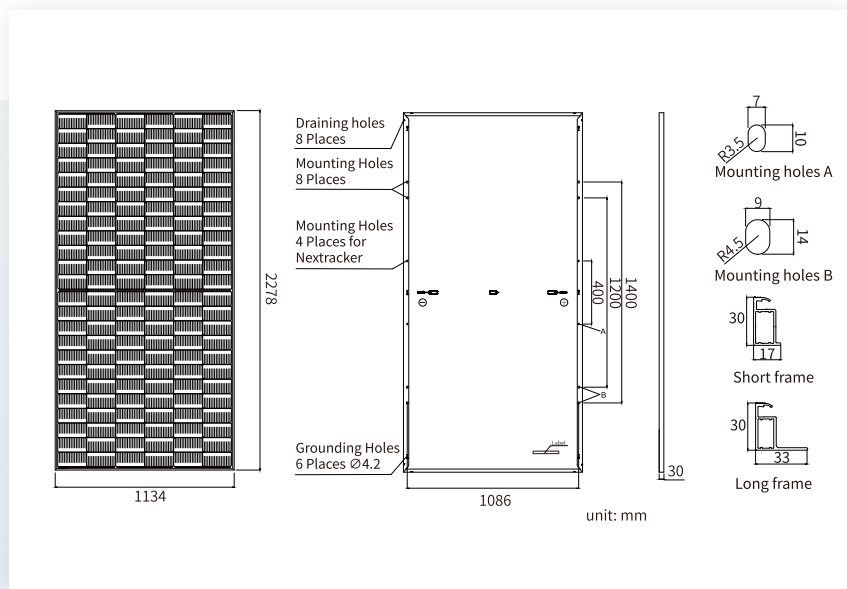

MECHANICAL PARAMETERS

Cell	Mono
Weight	27.3kg
Dimensions	2278 × 1134mm × 30mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6 × 24)
Junction Box	IP68, 3diodes
Connector	QC Solar QC4.10-351/QC4.10-35 Stäubli PV-KST4-EVO2A/xy ,PV-KBT4-EVO2A/xy
Cable Length (including Connector)	Portrait: 300mm(+)/400mm(-) Landscape: 1200mm(+)/1200mm(-)
Front Glass/Back Glass	3.2mm
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container
Country of Manufacturer	China/Vietnam

Remark: customized frame color and cable length available upon request

ELECTRICAL PARAMETERS AT STC


TYPE	JAM72S40 -580/MR	JAM72S40 -585/MR	JAM72S40 -590/MR	JAM72S40 -595/MR	JAM72S40 -600/MR	JAM72S40 -605/MR
Rated Maximum Power(Pmax) [W]	580	585	590	595	600	605
Open Circuit Voltage (Voc) [V]	51.95	52.16	52.37	52.58	52.79	53.00
Maximum Power Voltage(Vmp) [V]	44.02	44.22	44.43	44.64	44.85	45.05
Short Circuit Current(Isc) [A]	13.84	13.89	13.94	13.99	14.04	14.09
Maximum Power Current(Imp) [A]	13.17	13.23	13.28	13.33	13.38	13.43
Module Efficiency [%]	22.5	22.6	22.8	23.0	23.2	23.4
Power Tolerance	0~+3%					
Temperature Coefficient of Isc(α _{Isc})	+0.045%/°C					
Temperature Coefficient of Voc (β _{Voc})	-0.250%/°C					
Temperature Coefficient of Pmax(γ _{Pmp})	-0.290%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types. Measurement tolerance at STC: Pmax ±3%, Voc ±3% and Isc ±5%.

ELECTRICAL PARAMETERS AT NOCT

TYPE	JAM72S40 -580/MR	JAM72S40 -585/MR	JAM72S40 -590/MR	JAM72S40 -595/MR	JAM72S40 -600/MR	JAM72S40 -605/MR
Rated Max Power(Pmax) [W]	439	443	447	450	454	458
Open Circuit Voltage(Voc) [V]	49.35	49.55	49.75	49.95	50.15	50.35
Max Power Voltage(Vmp) [V]	41.66	41.85	42.04	42.24	42.43	42.64
Short Circuit Current(Isc) [A]	11.07	11.11	11.15	11.19	11.23	11.27
Max Power Current(Imp) [A]	10.54	10.58	10.62	10.66	10.70	10.75
NOCT	Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G					

CHARACTERISTICS

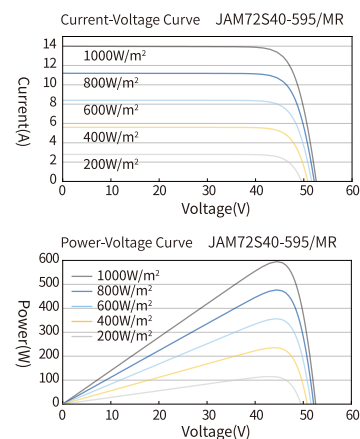

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C~+85°C
Maximum Series Fuse Rating	25A
Maximum Static Load, Front	3600Pa, 1.5
Maximum Static Load, Back	1600Pa, 1.5
NOCT	45 ± 2°C
Safety Class	Class II
Fire Safety Class	Class C