

Harvest the Sunshine


605W



JA SOLAR

JAM72D40 LB n-type Double Glass Bifacial Modules

Premium Cells



MBB Half-Cell
Technology

26%



Cell Conversion
Efficiency

Premium Modules



Higher power
generation better LCOE




n-type with very
Lower LID



Better Temperature
Coefficient



Better low irradiance
response

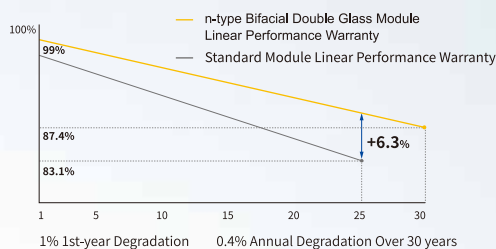

12-year product
warranty



30-year linear power
output warranty

*Remark: The performance warranty applies at STC condition.


Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules - Quality system for PV module manufacturing



DEEP BLUE 4.0 Pro

JAM72D40 LB n-type Double Glass Bifacial Modules

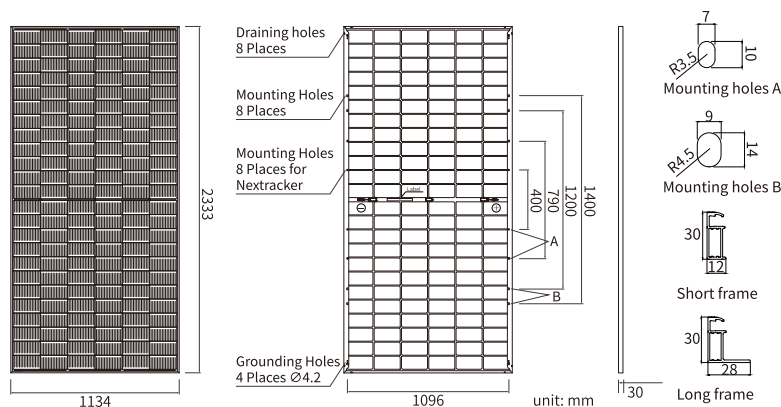

MECHANICAL PARAMETERS

Cell	Mono
Weight	32.5kg
Dimensions	2333mm × 1134mm × 30mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6 × 24)
Junction Box	IP68, 3diodes
Connector	Stäubli PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy QC Solar QC4.10-351/ QC4.10-35
Cable Length (Including Connector)	Portrait: 400mm(+)/200mm(-) Landscape: 1400mm(+)/1400mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	36pcs/Pallet, 720pcs/40HQ Container
Country of Manufacturer	China/Vietnam
Remark: customized frame color and cable length available upon request	

ELECTRICAL PARAMETERS AT STC and BNPI

TYPE	JAM72D40 -590/LB STC BNPI	JAM72D40 -595/LB STC BNPI	JAM72D40 -600/LB STC BNPI	JAM72D40 -605/LB STC BNPI
Rated Maximum Power(Pmax) [W]	590 650	595 655	600 660	605 665
Open Circuit Voltage (Voc) [V]	52.00 52.00	52.20 52.20	52.40 52.40	52.60 52.60
Maximum Power Voltage(Vmp) [V]	43.41 43.41	43.59 43.59	43.76 43.76	43.94 43.94
Short Circuit Current(Isc) [A]	14.35 15.81	14.42 15.87	14.48 15.93	14.53 15.97
Maximum Power Current(Imp) [A]	13.59 14.98	13.65 15.03	13.71 15.09	13.77 15.14
Module Efficiency [%]	22.3	22.5	22.7	22.9
Short Circuit Current (Isc) [A] at BSI	17.64	17.69	17.74	17.78
Power Tolerance	0~+3%			
Temperature Coefficient of Isc(α _{Isc})	+0.045%/°C			
Temperature Coefficient of Voc (β _{Voc})	-0.250%/°C			
Temperature Coefficient of Pmax(γ _{Pmp})	-0.290%/°C			

STC Irradiance 1000W/m², cell temperature 25°C, AM1.5G

BNPI Front Irradiance 1000W/m², rear Irradiance 135W/m²

BSI Front Irradiance 1000W/m², rear Irradiance 300W/m²

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer.

They only serve for comparison among different module types.


Measurement tolerance at STC and BNPI: Pmax±3%, Voc±3%, and Isc±5%, and the tolerance of Isc at BSI: ±5%.

ELECTRICAL CHARACTERISTICS WITH 10% Bifacial Gains and Low Irradiance Of 200W/m²

TYPE	JAM72D40 -590/LB 10% 200W/m ²	JAM72D40 -595/LB 10% 200W/m ²	JAM72D40 -600/LB 10% 200W/m ²	JAM72D40 -605/LB 10% 200W/m ²
Rated Max Power(Pmax) [W]	637 114.86	643 115.88	648 117.75	653 118.63
Open Circuit Voltage(Voc) [V]	52.00 48.94	52.20 49.13	52.40 49.33	52.60 49.52
Max Power Voltage(Vmp) [V]	43.41 42.34	43.59 42.51	43.76 42.68	43.94 42.85
Short Circuit Current(Isc) [A]	15.50 2.87	15.57 2.88	15.64 2.90	15.69 2.91
Max Power Current(Imp) [A]	14.68 2.71	14.74 2.73	14.81 2.76	14.87 2.77
Irradiation Ratio (rear/front)	10%			
Low Irradiance	(200±2) W/m ² , module at (25±2) °C			

** For Nextrack installations, maximum static load please take compatibility approve letter between JA Solar and Nextrack for reference.

CHARACTERISTICS

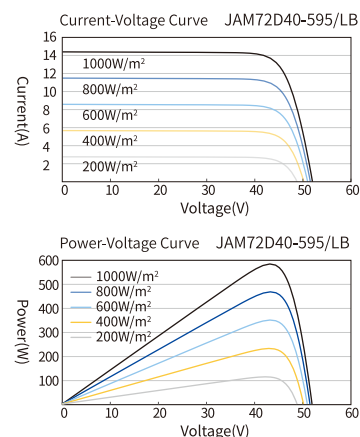

OPERATING CONDITIONS

Maximum System Voltage	1500V DC
Operating Temperature	-40°C ~ +70°C
Maximum Series Fuse Rating	30A
Maximum Static Load, Front*	3600Pa, 1.5
Maximum Static Load, Back*	1600Pa, 1.5
NOCT	45±2°C
Bifaciality	φPmax(80±5)%, φVoc(98±5)%, φIsc(80±5)%
Safety Class	Class II
Fire Performance	Class C

*PV module 98th percentile operating temperature : 70°C